

KERRO ANALYTICAL SCALE

Max: 220gm / 0.1mg

Model No. BL 2204 Ext.

(External Automatic Calibration)


Series: P-7

Readability: 0.0001g (0.01mg)

Capacity: 0-220 g

Repeatability: < = 0.0002 g

Linearity: < = 0.0005 g

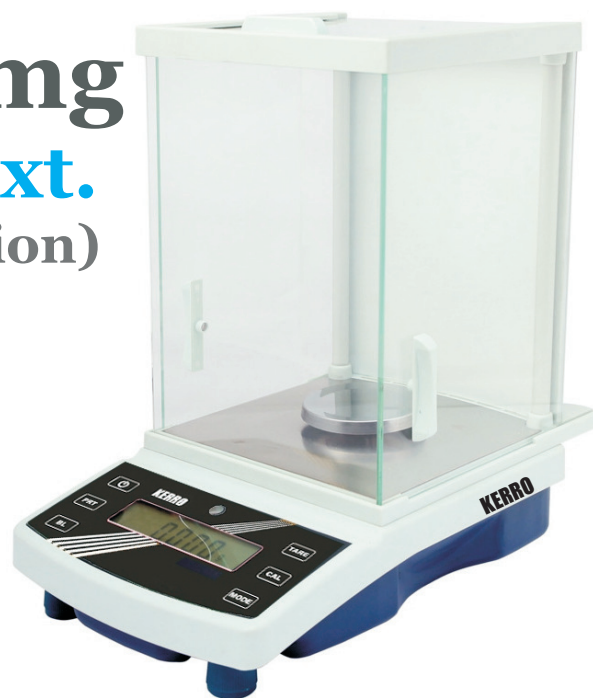

Outline Dimension (L×W×H): 13.8"×8.5"×13.4" (350×215×340 mm)

Glass Windshield (L×W×H): 6.7"×7.1"×9.4" (170×180×240 mm)

Material breakdown: ABS, STAINLESS IRON, ALUMINUM ALLOY, GLASS WINDSHIELD

Certificate : CE, ISO, ROHS

1. Pan: Circle 90 mm SST 304

2. Display: Large LCD (white bright backlit) (L×W) 4.7"×2.4" (120×60 mm)

3. Interface: Rs232C

4. Power: AC (220-240V 50HZ / 110-120V 60HZ)

5. Units: g, oz, ct, lb.

6. Functions: Counting, Percentage, Full Range Tare, Over-Load Protection, Zero Tracking, Automatic Error Correction & Automatic External Calibration

7. Attachments: English manual, Adapter, Under hook, Dust guard, F1 class calibration weight

8. FOUR type Speed.

9. Integrating time: 2 / 4 / 8 s

10. Value stable time: < = 5 s

11. Power Consumption: 15

Sales packaging: 1 pc / carton

Inner packaging size: 39×30×45 cm/box


Master carton size: 49×40×56 cm/carton

Master CBM: 0.1

G.W./carton: 11 kg

N.W./carton: 7 kg

KERRO

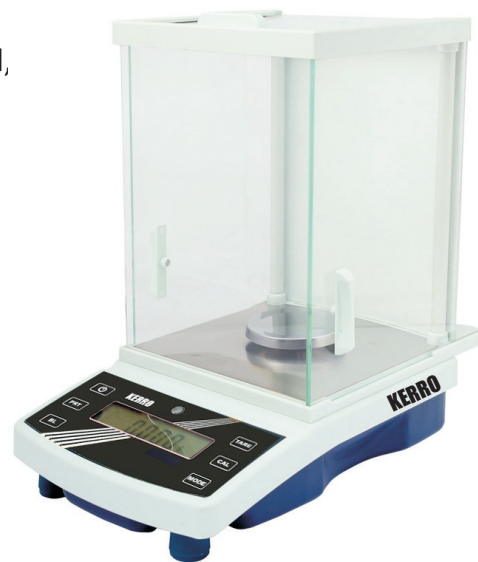

Auth. Distributor